




J&D Model Number : JDT60V

Complied to IEC 62053, -21, -23, EN 50470-3 & RoHS

Electrical Properties

- ◆ Rated Current for 60A / 24mA
- ◆ Turns Ratio for 1 : 2500
- ◆ I_{peak}^{\wedge} (A_{0p}) for 60A
- ◆ Phase error (°) for 2.63
- ◆ L (H) for 5.05 ± 15%
- ◆ DCR (Ω) for 63 ± 6%
- ◆ Suggested burden resistor (Ω) for 10
- ◆ Ambient Temp. range for -40 °C~+70 °C
- ◆ Storage Temp. range for -40 °C~+85 °C
- ◆ High-Potential Voltage for a.c 2.5KV / 1min
- ◆ Insulation Resistance for DC500V / 100MΩ
- ◆ Operating Frequency for 50/60Hz

Dimensions

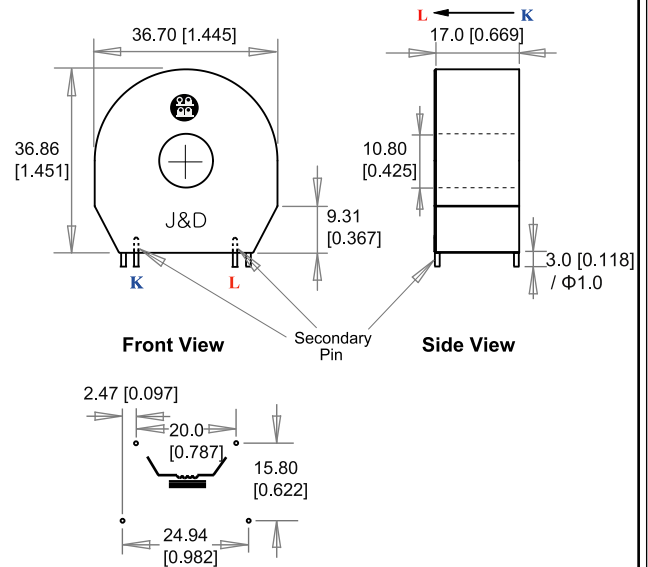

Unit : mm [inch]

Calculated Temperature behaviour of the errors of 60A CT

